High Speed Door Albany RR300



UNITED STEEL PRODUCTS, INC


33-40 127th Place Flushing NY 11368

P: (718) 478-5330 F: (718) 779-8258 www.UnitedSteelProducts.com

The global leader in

ASSA ABLOY

ASSA ABLOY Entrance Systems

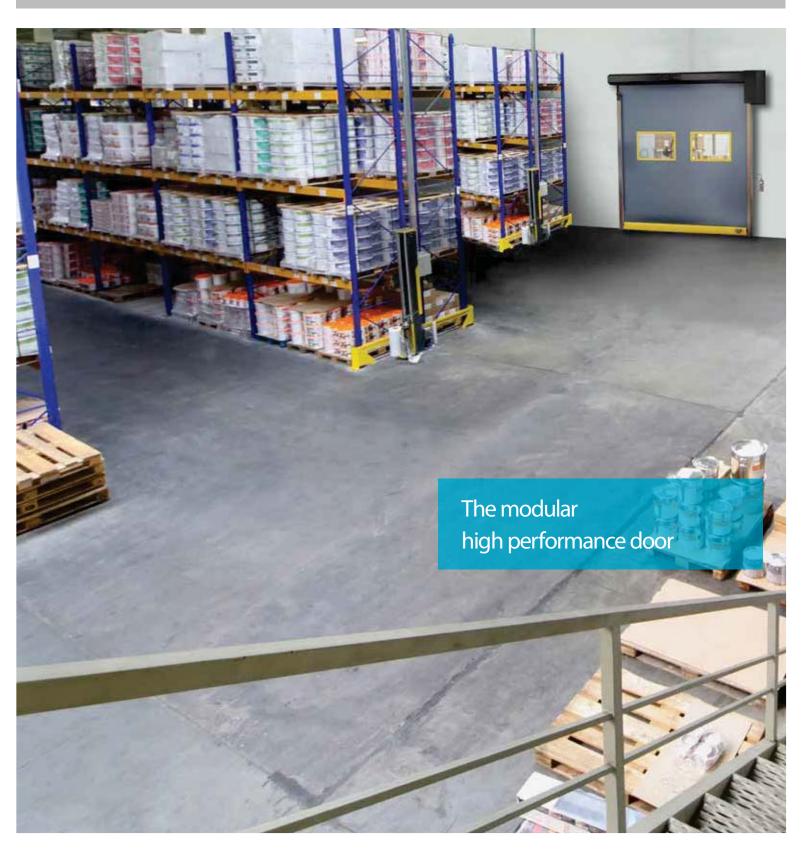



The Albany RR300 is the most versatile high speed door on the market. This single product can be easily customized for a range of interior applications – high traffic areas, clean and hygienic spaces, high pressure zones and much more. Select from a variety of fabrics, window panel options and top roll cover materials to create the perfect, fast-opening door for your facility.





Optimize Limited Space

The Albany RR300 isolates distinct areas while improving the overall flow of business. This high performance door opens automatically and quickly at 80" per second, avoiding damage from forklift operators, and dirt and grime from bins and pallets. When the door is closed, a tight seal is formed around the entire perimeter of the door, helping to keep out debris and maintain separate temperatures where necessary.

The affordable Albany RR300 serves as the ideal barrier between separate spaces, with innovative features that outperform and outlast interior sectional doors or simple strip curtains. Easy, touch-free operation keeps traffic moving freely and helps to create a trouble-free work environment. Impressive safety features protect workers and products. The simple design, with minimal parts, and low-profile side frames, ensures gentle, quiet operations – and allows the Albany RR300 to be installed almost anywhere.

Albany RR300 Doors Protect Air Design's High Quality Products from Dust & Damage

Air Design, located in Cuernavaca, Mexico, creates beautifully-crafted external elements to make cars more aerodynamic, improving speed and decreasing fuel usage.


The Problem

Air Design was in need of a door that could protect the high-quality product they're known for. They paint aerodynamic parts for highend international car makers and they need to ensure that no dust particles enter the paint booths.

The Solution

ASSA ABLOY Entrance Systems provided Air Design with three Albany RR300 doors. With fast opening speeds and a one-second delay

upon closing, the Albany RR300 moves fast enough to keep any dust in the factory from entering the paint booths. When the Albany RR300 is closed, the paint booths at Air Design benefit from the super tight, double seal protection around the perimeter of the door that prevents air and dust from seeping in. Finally, the light curtain safety sensors recognize when a person or object is in the doorway and then immediately reverse the door to the open position. The light curtain will prevent Air Design's freshly painted products from ever getting damaged. The tight seal, high speed and safety system on the Albany RR300 door are perfect for protecting Air Design's superior products, giving what was once a family workshop the tools it needs to continue growing into an international business.

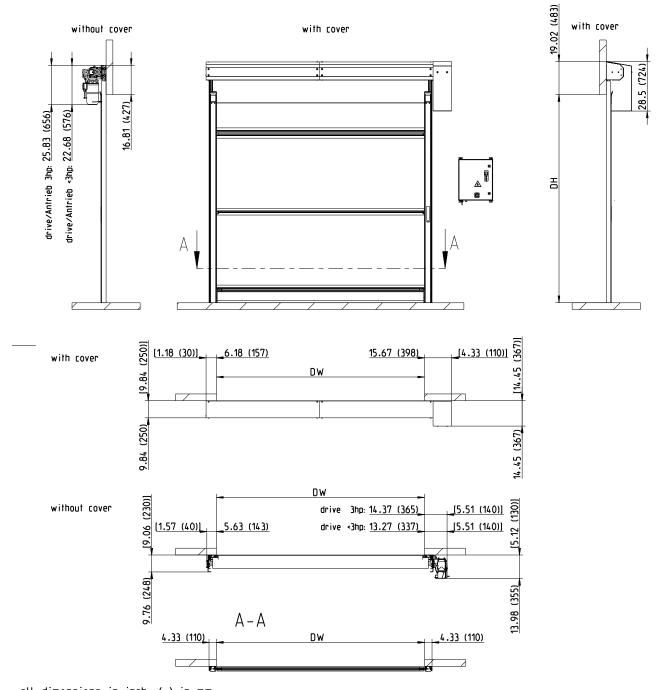

all dimensions in inch. () in $\ensuremath{\mathsf{mm}}$

Available sizes		
	DW	DH
min:	3ft (914)	3ft (914)
max:	14ft (4267)	14ft (4267)

[] = Space needed for installation

9300R0013/b			
Stand:	2014-04-08		

Technical Information

Door Dimensions

 Min Width
 3 ft (914 mm)

 Max Width
 14 ft (4,267 mm)

 Min Height
 3 ft (914 mm)

 Max Height
 14 ft (4,267 mm)

Speeds

Opening Speed Up to 80 in/sec Closing Speed ≈24 in/sec

Wind Resistance

Static Wind Load50 mphStatic Pressure Load6 psfOperating Wind Load30 mphOperating Pressure Load2.3 psf

Door Panel

Self-Repairing Breakaway YES

(bring panel to front, push button)

Operating Noise <70 dBA
Applicable Agency Approvals UL508A

Door Curtain Construction Captured Panel: 2-ply PVC Fabric with wind knobs

*RollText and 40oz. vinyl

*Optional wind ribs with replaceable full-width vision panels

Safety Features

Reversing Edge Type Wireless electric contact edge Photo Safety Type Through-beam photoeye

Door Components

Side Frame Construction

Bottom Beam Construction

Padded aluminum with high-visibility

yellow loop seal

Top Roll Construction Extruded aluminum with steel axles
*Roll Cover Construction 22 gauge steel powder-coated black (RAL 9005)
*Motor Cover Construction 22 gauge steel powder-coated black (RAL 9005)

Control and Drive System

Motor Environmental Rating

Control Panel MCC VectorControl TM Voltage Options *208V 3Ø (± 10%) 230V 3Ø (± 10%)

460V 3Ø (± 10%) *575V 3Ø (± 10%)

Motor Size Up to 2.0hp helical-worm gearmotor Warranty Terms 5-years / 1 Million Cycles on Drive Motor;

2 years all other

mechanical & electrical

Operating Temperature Range Standard 40 °F - +110 °F (4 °C - +43 °C)

*Extended 32 °F - +140 °F (0 °C - +60 °C)

Controls Environmental Rating

NEMA-4 IP-55

*ACS50 1-Speed Control System Warranty on ACS50 Control System is


1-year for parts and labor.

Other voltage restrictions may apply

We offer various options and actuation devices



Low-Profile Side Frame Slim side frame is only 4" wide and projects 3" from the wall for easy installation almos anywhere.



Captured Panel No wind ribs allow for fast and quiet operation.



Light Curtain Smart safety system eliminate contact with objects in doorway.

ASSA ABLOY

ASSA ABLOY Entrance Systems is a leading supplier of entrance automation solutions for efficient flow of goods and people. With our globally recognized product brands Besam, Crawford, TKO, Albany and Megadoor, we offer products and services dedicated to satisfying end-user needs for safe, secure, convenient and sustainable operations.

ASSA ABLOY Entrance Systems is a division within ASSA ABLOY

assaabloyentrance.us • assaabloyentrance.ca





ASSA ABLOY Entrance Systems

Tel: 1-800-252-2691 info.na.aaes@assaabloy.com assaabloyentrance.us



UNITED STEEL PRODUCTS, INC

33-40 127th Place Flushing NY 11368

P: (718) 478-5330 F: (718) 779-8258 www.UnitedSteelProducts.com Follow us:







Please enter ASSA ABLOY Entrance in the channel's search field.